



10 Zone Weekly Timer with Mp3

T-6232




Features

- * Built-in weekly timer, monitor, 10 zone speaker selector, 6 channel power sequencer and Mp3 player.
- * Expandable from 10 zones to 160 zones.
- * Single Scheduled background music + 160 zone paging + multi voice alarm system.
- * Single scheduled background music from T-6232 weekly timer's built-in MP3 player.
- * 3 modes of voice alarm: all zones, separate zone and neighboring zones voice alarm.
- * Max support connecting 16 pcs zone selector T-6212(A).
- * 5 amp inputs, 10 zones speaker output.
- * Timely broadcast is up to 99 program sources.
- * Broadcast modes: random, repeat and circle.
- * 8 regular programs and 1 spare program for emergency/particular circumstance.
- * Functional swift key for internal MP3 player priority manual broadcast.
- * Zone 1-10 selector, all zone selector, music/paging switch, MP3 swift button, swift program button, power control channel 1-4 buttons, up/down/left/right/ok button.
- * External power control, external monitor, speaker fault detection and amplifier fault changeover all are optional could be added.
- * Power handling 500W over each zone.
- * System communication is through CAT 5 cable.
- * The system communication distance is up to 1km.
- * Support memory function in case of power off.

Optional

- * Panel with/without handhold.

Rear Panel

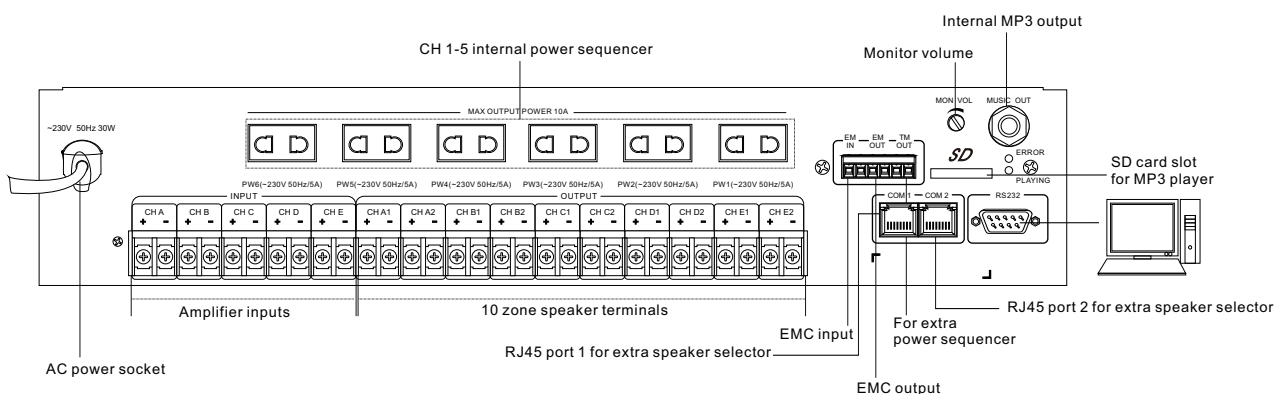

Specifications

| | |
|--|---|
| Model | T-6232 |
| Power Output | ~110V-230V 50/60Hz 4 Program Power+2 AUX power Total Power ≤5KW |
| Function Button | Light touch press buttons include 4 power switch buttons, 1 MP3 control button, 1 backup program switch, 10 zones speaker selector button, all zones button, 1 music or paging switch button. 4 menu buttons for switch, 1 ok button |
| Indication Method | 192x64 LCD display, English |
| Audio Output | 1KΩ 0.775V Unbalance (6.35 RC) |
| Voltage Input and Output of Alarm | 0V(Short Circuit) Industrial Standard |
| Voltage Output for Power Control | Integrated Terminal Block 0V(Short Circuit) Industrial Standard |
| Amplifier Input and Output | Integrated Terminal Block CHA CHB CHC CHD CHE CHA1-A2 CHB1-B2 CHC1-C2 CHD1-D2 CHE1-E2 |
| Monitor Power of Speaker | 0.5W |
| Time Mode | 24 hours(hour-minutes-seconds) weekly |
| Program Quantity | Total 9pcs(8 normal programs, 1EMC) |
| Program Steps | Total 512 Steps, 1 day≤200 Steps |
| Communication Protocols | RS422 |
| Communication Port | RJ45 |
| Communication Speed | 4800bps |
| Zone Control | 160 zone(16pcs T-6212(A) 10 zone speaker selector) |
| MP3 Frequency Response | 20Hz~20KHz/ ±1dB |
| Mp3 Store Format | Compatible FAT16, FAT32 |
| Power Supply | ~110V-230V 50/60Hz |
| Dimensions | 484 x 350 x 88mm |
| Weight | 6.06Kg |