


4 ZONES FIRE ALARM CONTROL PANEL

CM-SP-4Z

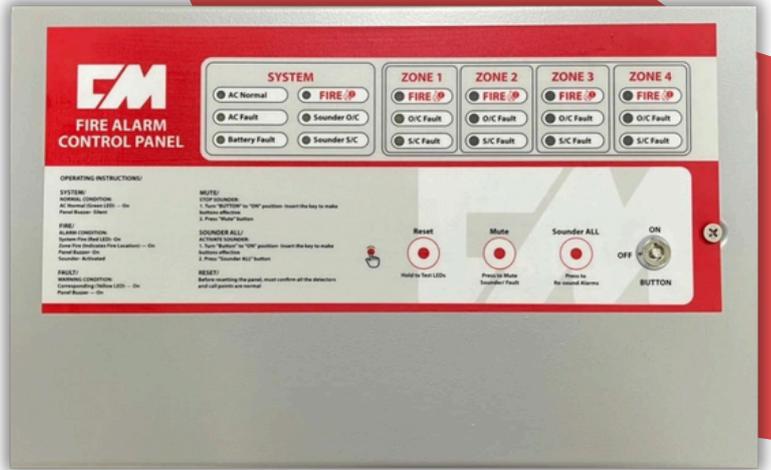

NORMAL OPERATING MODE indicated by the green LED AC ON being illuminated while all other LED's are extinguished. In this mode, the system will monitor and react to all alarm and fault inputs. Whenever maintenance or fault finding has been completed, the system **MUST** be returned to this mode.

GENERAL SPECIFICATIONS (ELECTRICAL)

Main Supply:

240V AC 50/60 Hz \pm 10%

Battery Voltage: 24V DC

Charging Voltage Protection:

Glass Fuse

Sounder Output:

24V Nominal EOL 10K Resistor

Auxiliary Contacts:

30VDC 1A max NC/NO

Main Supply Protection: Glass Fuse

Sounder Protection: Glass Fuse


Reverse Battery Protection:

Charger Glass Fuse


Zone EOL: 5.6K Resistor

FIELD EQUIPMENT TERMINATIONS


2 Wire / Normal Mode

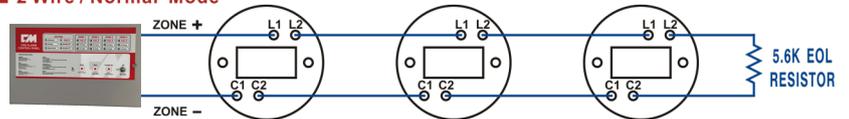


3 Wire / Remote Led Indicator

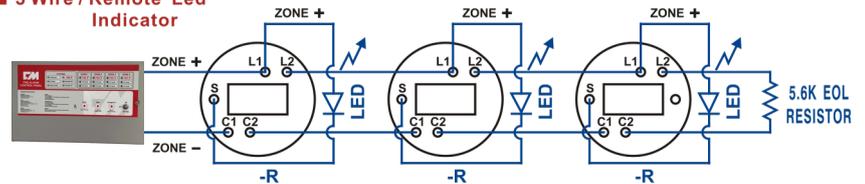

4 Wire / Auxiliary Contacts

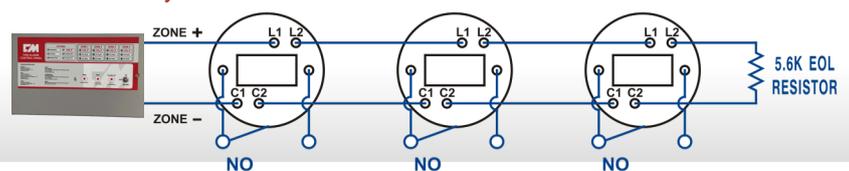

BATTERY TERMINATIONS

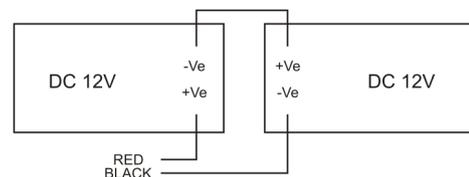

www.himmax.com

09178229900 /
09998847657

(02) 8967-6107/ 7211-0514

44 Congressional Ave. Project
8, Quezon City 1106