

# CM-WS26L

Rate of Rise Heat Detector


ISO9001  
Approvals: CE



## ■ ADVANTAGES

- \* Mechanical operating principles ensure the long-term durability and the least malfunction.
- \* Self-restoring function ensures the elements can be used repeatedly.
- \* The exhaust valve of R.O.R. Heat Detector part uses optical fiber glass capillary tube that's heat-resistant and moisture-proof to avoid false alarms.

## ■ DIMENSIONS

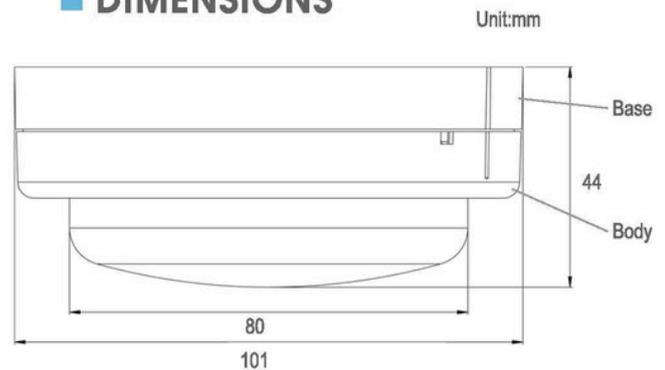

## ■ SPECIFICATION

MODEL NO.	CM-WS26L	AMBIENT TEMP.	-10°C ~ +55°C
TYPE	2-wire	AMBIENT HUMIDITY	0 ~95%
VOLTAGE RANGE	12V~30V DC	MATERIAL	Burning-Proof plastics
ALARM CURRENT	24V DC 30mA	DIMENSIONS	101(Dia.) x 44(H)mm
POLARIZATION	Non-polarized	WEIGHT	115g
SENSITIVITY SETTING	Comply to CNS	COLOR	White

## ■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4M	4M ~ 8M
FIRE-PROOF BUILDING	70M <sup>2</sup>	35M <sup>2</sup>
ORDINARY BUILDING	25M <sup>2</sup>	25M <sup>2</sup>



HIMMAX ELECTRONICS  
CORPORATION

(02) 8967-6107 / 7211-0514

[www.himmax.com](http://www.himmax.com)

44 Congressional Ave.  
Project 8, QC 1106

09178229900 / 09998847657

[fb.com/himmaxelectronics](https://fb.com/himmaxelectronics)